


## iS System

### HIGH EFFICIENCY BOILERS

#### Clearances and dimensions

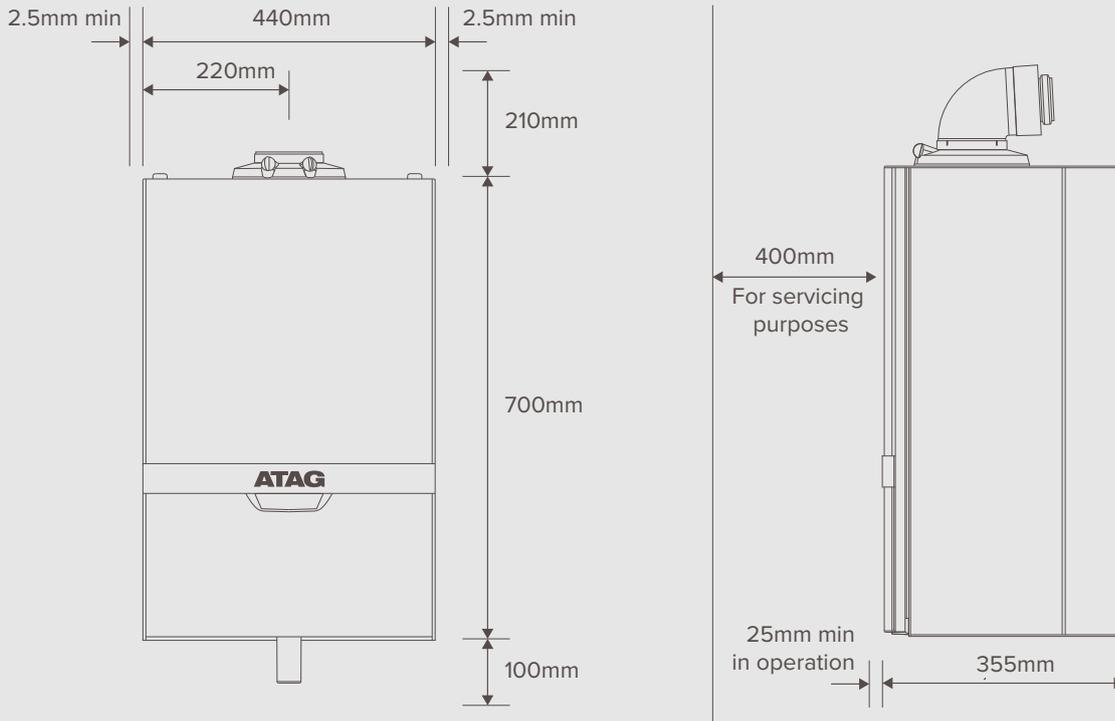

iS System boilers	i15S	i18S	i24S	i32S	i40S
Part number	BS300515	BS300518	BS300524	BS300532	BS300540
ErP Seasonal space heating energy efficiency class	A	A	A	A	A
ErP Seasonal space heating energy efficiency (%)	93	93	94	94	94
CH Output kW	15	18	24	32	40
SEDBUK 2009 (%)	89.8	89.8	89.8	89.8	89.8
Dimensions (H x W x D) (mm)	700 (H) x 440 (W) x 355 (D)				
Boiler lift weight with jig (kg)	39	39	39	42	42
Standard warranty (years)	12	12	12	12	12
LPG conversion kit available	Yes	Yes	Yes	Yes	Yes
Solar compatible	Yes	Yes	Yes	Yes	Yes
NOx class / NOx mg / kWh	6 / 28.90	6 / 28.74	6 / 30.02	6 / 25.71	6 / 27.10
Ingress protection (IP)	IPX4D	IPX4D	IPX4D	IPX4D	IPX4D
Maximum equivalent horizontal flue length (m) 60/100mm	15	15	15	9	9
Maximum equivalent vertical flue length (m) 60/100mm	15	15	15	9	9
Maximum equivalent horizontal flue length (m) 80/125mm	50	50	50	45	45
Maximum equivalent vertical flue length (m) 80/125mm	50	50	50	45	45